


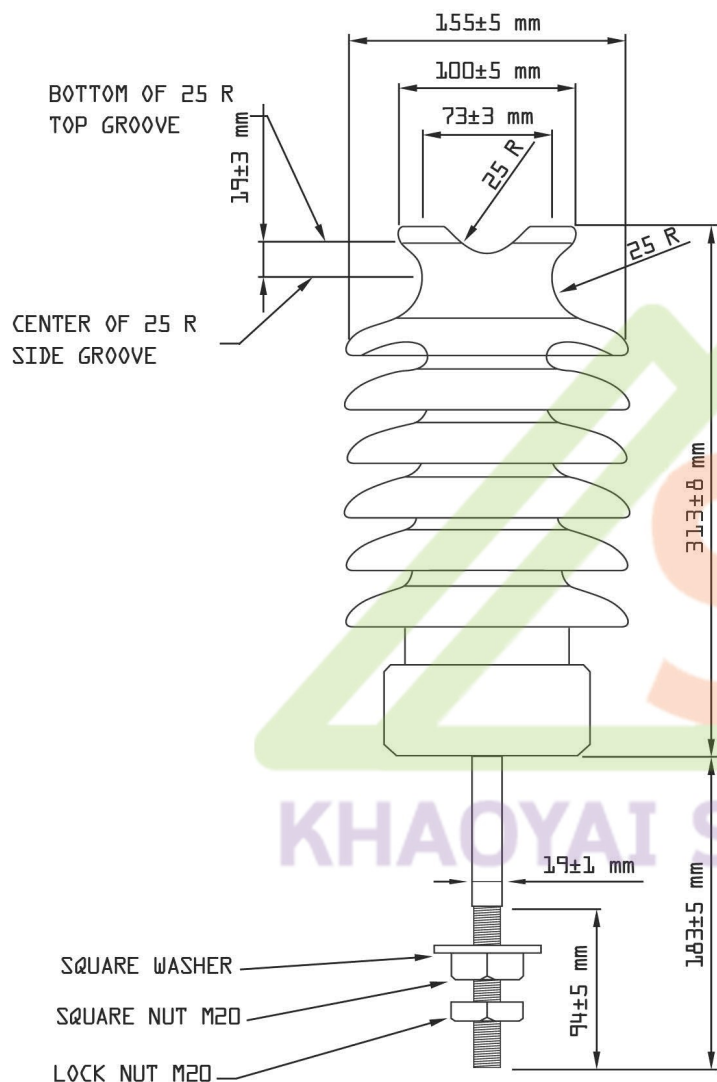

TIS 1077 LINE-POST INSULATOR			TYPE 57-2
DIMENSIONS	Leakage distance, minimum	mm.	559
	Protected leakage distance, minimum	mm.	224
	Dry-arcing distance, minimum	mm.	241
MECHANICAL VALUES	Cantilever strength	kN	12.5
	Cantilever proof load	kN	5
ELECTRICAL VALUES	Low-frequency dry flashover	kV	110
	Low-frequency wet flashover	kV	85
	Critical-impulse flashover, positive	kV	180
	Critical-impulse flashover, negative	kV	205
RADIO INFLUENCE VOLTAGE DATA	Low-frequency test voltage, rms to ground	kV	22
	Maximum riv at 1,000 kHz., Radio freed	μV	100
COLOUR OF INSULATOR			BROWN

SPECIFICATION

LINE-POST TYPE PORCELAIN INSULATORS ACCORDING TO
TIS. 1077 TYPE 57-2L ANSI CLASS 57-2L

SIAM PERFECT INSULATOR CO.,LTD.

DRAWN : ARIYACHAI W.

APPROVED : AMORNSAK J.

CATALOGUE NO.

SPI-572

DATE : 26 DECEMBER 2017

UNIT : mm.

REV. : 1

DRAWING NO.

D-101