


COPY # 8

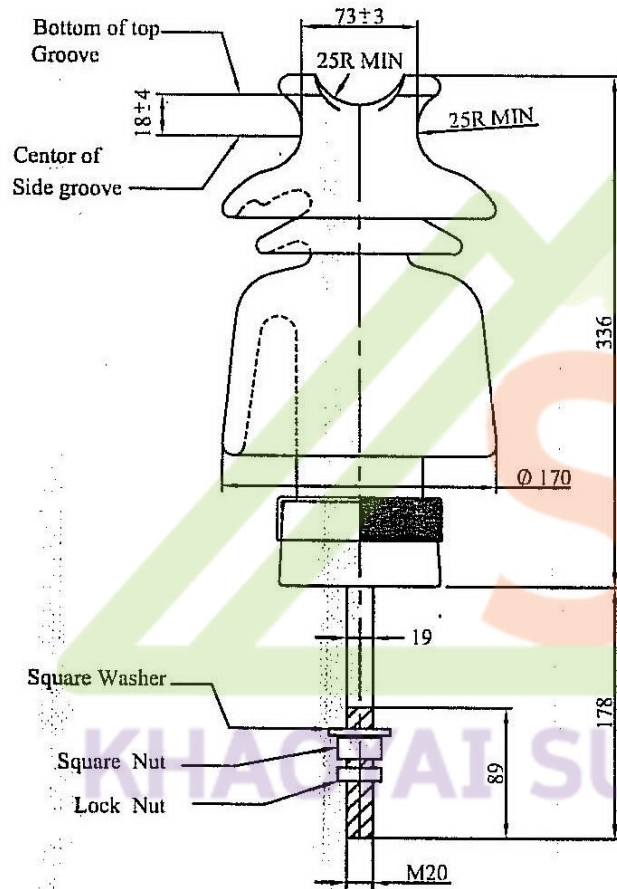

Leakage distance , mm	534
Dry - arcing distance , mm	241
Protected Leakage distance (mm)	267
Cantilever strength , kN	12.5
Cantilever proof load , kN	5
Low - frequency dry flashover , kilovolts	110
Low - frequency wet flashover , kilovolts	80
Critical - impulse flashover , positive , kilovolts	180
Critical - impulse flashover , negative , kilovolts	205
Low - frequency test voltage , rms to ground , kilovolts	22
Maximum RIV at 1,000 kHz , microvolts	100
Puncture proof	Yes
Colour of insulator glazed	Brown

INSULATOR , PIN - POST TYPE ACCORDING TO TIS. 1251 , TYPE 56 / 57 - 2

CATALOGUE NO. PP - 572

UNIT: mm.

SCALE : NTS.

REV:

DRAWN:

[Signature]

CHECKED:

[Signature]

APPROVED :

[Signature]

FINE ART CERAMIC CO.,LTD

DATE: 25/9/2007

DRAWING NO. FAC - 022